


Threshold Seals


Sealmaster®

SEALMASTER CYCLONE


For inward & outward opening external doors, double swing external & single swing & double swing internal doors

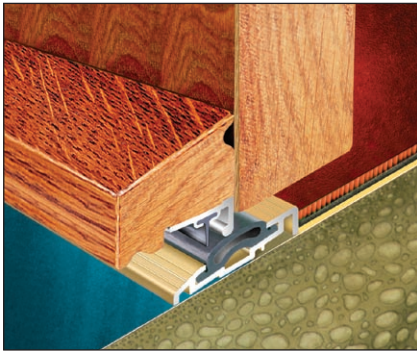


TDG/WEH

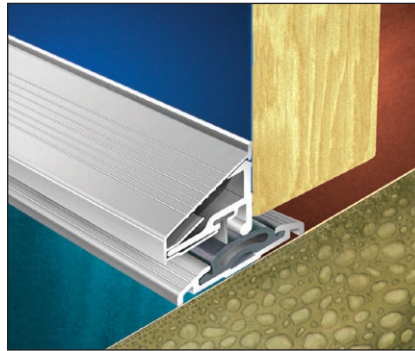


TES/WDS

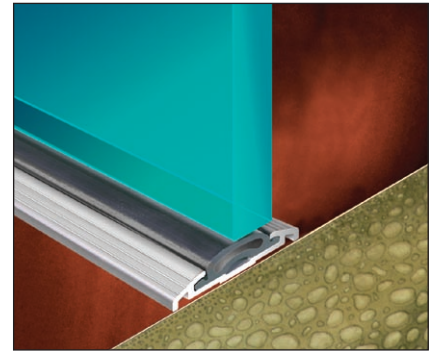


TES




WD




WE

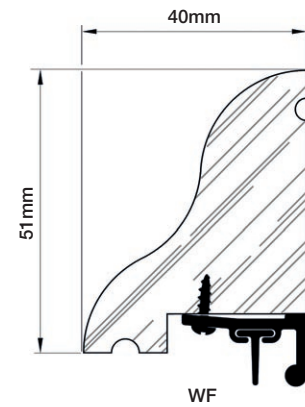


WF

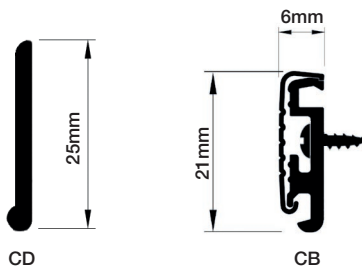


CD




CB



CC



TD



TE


Standard Options	Satin Silver CBS	Satin Gold CBG	Satin Silver CCS	Satin Gold CCG	Satin Silver CDS	Satin Gold CDG	None
Satin Silver - TDS	TDS/CBS		TDS/CCS		TDS/CDS		TDS
Satin Gold - TDG		TDG/CBG		TDG/CCG		TDG/CDG	TDG
Satin Silver - TES	TES/CBS		TES/CCS		TES/CDS		TES
Satin Gold - TEG		TEG/CBG		TEG/CCG		TEG/CDG	TEG

Threshold Seals


Sealmaster®

SEALMASTER CYCLONE


For inward & outward opening external doors, double swing external & single swing & double swing internal doors

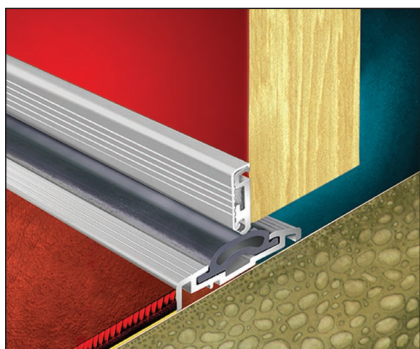

TDS/CDS

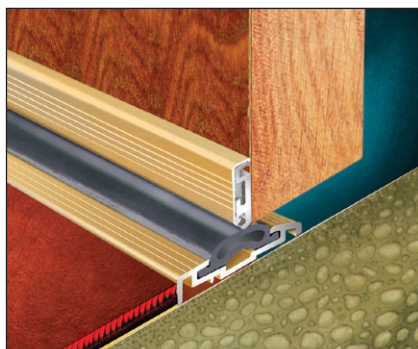

TDG/CBG

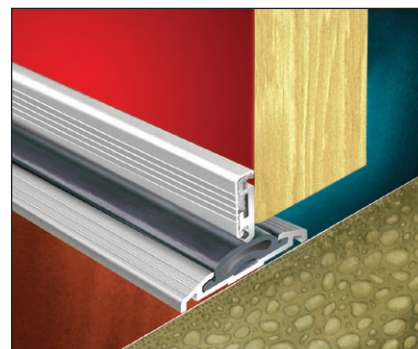

TES/CBS

APPLICATIONS

A versatile threshold seal combination with hidden fixings and options to suit virtually all hinged and pivoted doors.

FEATURES & BENEFITS

The Cyclone threshold and contact strip combinations can be used in most internal and external situations, including those with a high degree of exposure requiring weather tight seals.

The Cyclone threshold and weatherboard combinations can only be used on inward opening external doors that are sheltered from wind driven rain.

With the contact strip combinations, the Cyclone can be used on external doors to comply with Part M of the Building Regulations to allow ease of access. It can also be used with the Blizzard seal and other Sealmaster stop seals to

achieve an exceptional acoustic performance.

All fixings, in all the sections, are hidden to give clean, crisp lines in an attractive range of finishes.

The Cyclone threshold section is available in two low profile versions, one being symmetrical for application on top of carpet or vinyl floor finishes (section TE), the other has a flat face against which carpet or vinyl can be finished neatly (section TD).

Specialist applications include rooms with a gas flood fire suppression system installed. Studio and music room doors, as well as interview rooms, where a high level of acoustic performance is required and photographic dark rooms where a light, tight seal is needed.

HOW TO SPECIFY

e.g. Sealmaster Cyclone seal TDS/CBS (for threshold / contact strip) or TDS/WDS (for threshold / weatherboard) to suit door inmm wide opening.

Threshold to be bedded in silicone and fixed to floor with screws/plugs. Contact strip (or weatherboard) to be fixed to door with screws.

Standard Options	Satin Silver WDS	Satin Gold WDG	Softwood WEW	Redwood WER	Oak WEH	Softwood WFW	Redwood WFR	Oak WFH
Satin Silver TDS								
Satin Gold TDG								
Satin Silver TES								
Satin Gold TEG								
	TDS/WDS	TDG/WDG	TDS/WEW	TDS/WER	TDS/WEH	TDS/WFW	TDS/WFR	TDS/WFH
			TDG/WEW	TDG/WER	TDG/WEH	TDG/WFW	TDG/WFR	TDG/WFH
	TES/WDS		TES/WEW	TES/WER	TES/WEH	TES/WFW	TES/WFR	TES/WFH
		TEG/WDG	TEG/WEW	TEG/WER	TEG/WEH	TEG/WFW	TEG/WFR	TEG/WFH