


Door Stop & Window Seals


Sealmaster®

SEALMASTER HURRICANE

For heads & jambs of internal doors, external doors & hinged casement windows

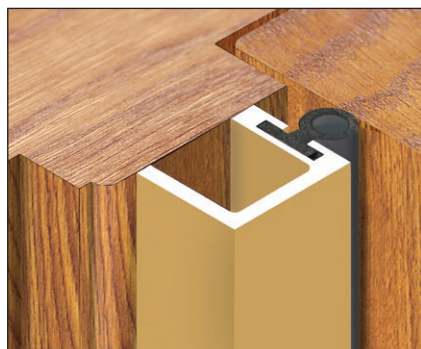

SGG/016

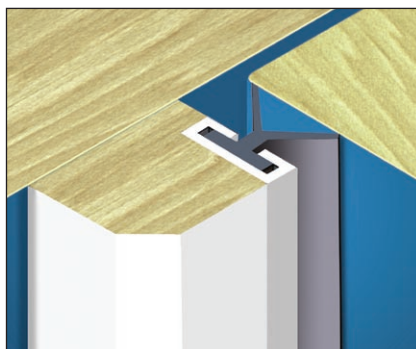

SFS/017



SFG/018

APPLICATIONS

A stop seal available in surface fixed or rebated designs and suitable for a wide range of window and door sealing applications.

FEATURES & BENEFITS

Hurricane rebated seals are primarily designed for use with new purpose made windows and doors whilst the surface fixed versions are suitable for upgrading existing windows and doors.

Hurricane rebated seals are particularly suited for fitting all around casement windows with cranked hinges.

Hurricane seals are suitable for:

- Situations where smoke / gas / air leakage is important. Leakage rates as low as 4m³ / hour / metre have been achieved at 600pa pressure, using a Hurricane rebated seal all around a timber casement window.
- Situations where water tightness is important. The Hurricane rebated seal with the 017 insert maintained watertightness at 750pa pressure.
- Darkrooms for photographic work.
- Situations where noise penetration is important. An improvement in the order of Rw=10dB in sound transmission has been achieved with the Hurricane rebated seal with the 014 insert.

Hurricane stop seal aluminium carriers are available with a wide range of angle blade and compression bulb inserts to suit the applications illustrated above and many others.

HOW TO SPECIFY

e.g. Sealmaster Hurricane SFS/014 to suit door / window inmm high bymm wide opening.

Standard Options	Insert 014	Insert 015	Insert 016	Insert 017	Insert 018
Satin Silver - SFS					
Satin Gold - SFG					
Satin Silver - SGS					
Satin Gold - SGG					

Door Stop & Window Seals


Sealmaster®

SEALMASTER HURRICANE


For heads & jambs of internal doors, external doors & hinged casement windows




SFG/017

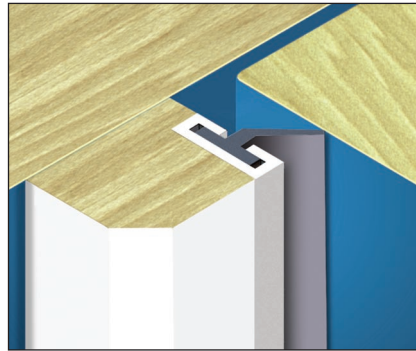


SFS/015

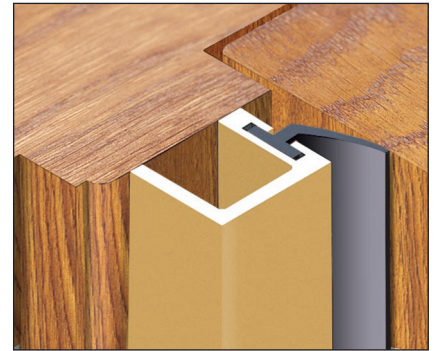


SGG/015




SG with 017




SG with 018




SG with 014




SG with 015




SG with 016




SF with 014




SF with 018



SF with 017



SF with 016



SF with 015